


VCGT-ZL

Product Images

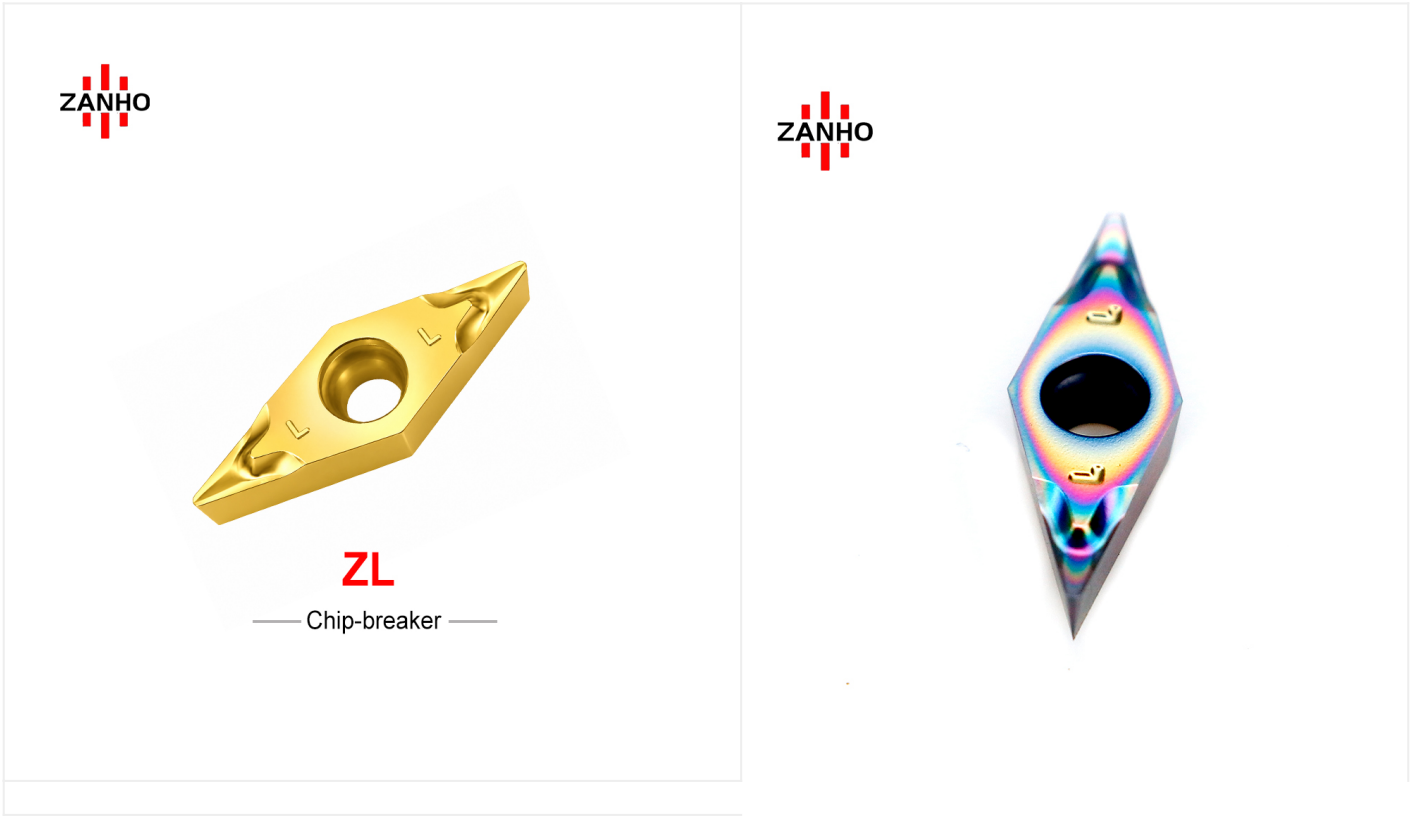

Summary

ZANHO VCGT1103-ZL is a high-precision **35° rhombic positive turning insert** specifically engineered for **Finishing Stainless Steel**. Featuring **G-grade tolerance** for superior dimensional accuracy, it is optimized for machining **303, 304, and 316 stainless steel**. The specialized **ZL chipbreaker** ensures excellent surface integrity and stable chip control at a consistent 1.0mm cutting depth.

Content

Key Performance & Features

- G-Grade Precision:** Manufactured to G-level tolerance standards, ensuring ultra-high dimensional consistency and minimal vibration for precision finishing tasks.

- **Stainless Steel Expert:** Specifically optimized for the unique challenges of SS303, SS304, and SS316, effectively preventing work hardening and edge buildup.
- **ZL Chipbreaker Geometry:** Designed for stable chip breaking at finishing feed rates, delivering superior surface smoothness and preventing chip-related surface marring.
- **Rhombic Clearance:** The 35-degree positive geometry provides exceptional clearance for complex profiling, multi-directional turning, and reaching intricate workpiece sections.

Technical Specifications

Model	Radius (re)	Feed (f)	Cut Depth (ap)
VCGT110301-ZL	0.1 mm	0.20 - 0.30 mm/r	1.0 mm
VCGT110302-ZL	0.2 mm	0.20 - 0.30 mm/r	1.0 mm
VCGT110304-ZL	0.4 mm	0.20 - 0.30 mm/r	1.0 mm

Professional Grade Precision Solutions

Ideal for high-accuracy parts and delicate stainless steel turning. Contact us for the best coating recommendations based on your material grade.

[? Back](#)

Thank you for your response. ?

????(required)

??(required)

??

??

•

Submit